


WXA

清水泵/白水泵

CLEAN WATER/WHITE WATER PUMPS

[DIN 24255]

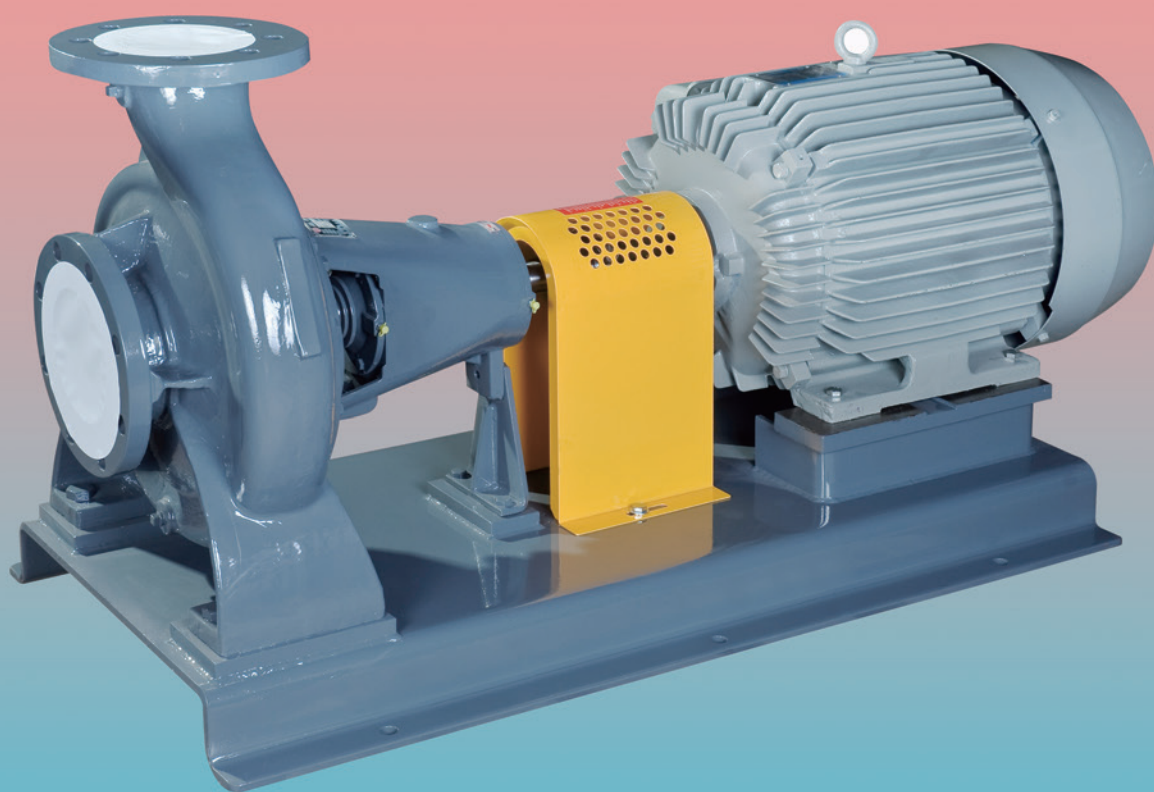

MIRDC

ISO 9001
6M7Y006-09



Testing Laboratory
2781

專營：離心泵、多段高壓泵、紙漿泵、
雷射對心墊片、自動加油杯。



萬事興實業有限公司
ALL STAR PUMP ENTERPRISE CO.,LTD.



》用途

- WXA系列採用封閉式葉輪,用來輸送清水與白水,專門針對製漿與造紙工業設計製造。
- WXA系列提供一般工業的清水或低濃度與低粘度的化學液體輸送,適用於工廠的公用設施給水與一般製程的液體輸送。

》技術特徵

- 背向拉出設計,利於拆卸及組裝,不必移動管路維修較容易。
- 符合DIN 24255規範,標準化泵浦設計。
- 模組化零件設計,提高零件互換性。
- 端吸型泵浦,中央出口管路設計。
- 高效率,低運轉成本。
- 性能穩定,高可靠度產品。
- 標準旋轉方向:馬達側視之,為順時針旋轉。

》配件

- 相對法蘭。
- 聯軸器。
- 密閉式安全護罩1件。
- 底座。
- 三相馬達,電壓:208~480V,頻率60/50Hz過載保護器
由使用者自行安裝在電控箱。

》Application

- WXA series with closed type impeller is used for pumping clean water and white water in pulp and paper industry
- General application is pumping clean water or chemical liquid in utility system of industries.

》Design Features

- Back pull-Out design with capability to remove rotor assembly without to dismantle the pipe lines at the suction or discharge of pump casing.
- Dimension according to DIN 24255
- Standardized parts can be interchanged easily
- End suction, center line discharge
- High efficiency, low running cost
- Steady and high reliable in performance
- Rotation direction is clock's wise from motor side.

》Accessories

- Butt joint flange 1 Set.
- Coupling 1 Set
- Coupling guard
- Base plate
- Three-phase motor:208~480V 60/50Hz ; overload protection to be provided by user and installed in the control panel




萬事興

ALL STAR PUMP

清水泵/白水泵 WXA

CLEAN WATER / WHITE WATER PUMPS

》構造說明(Construction)

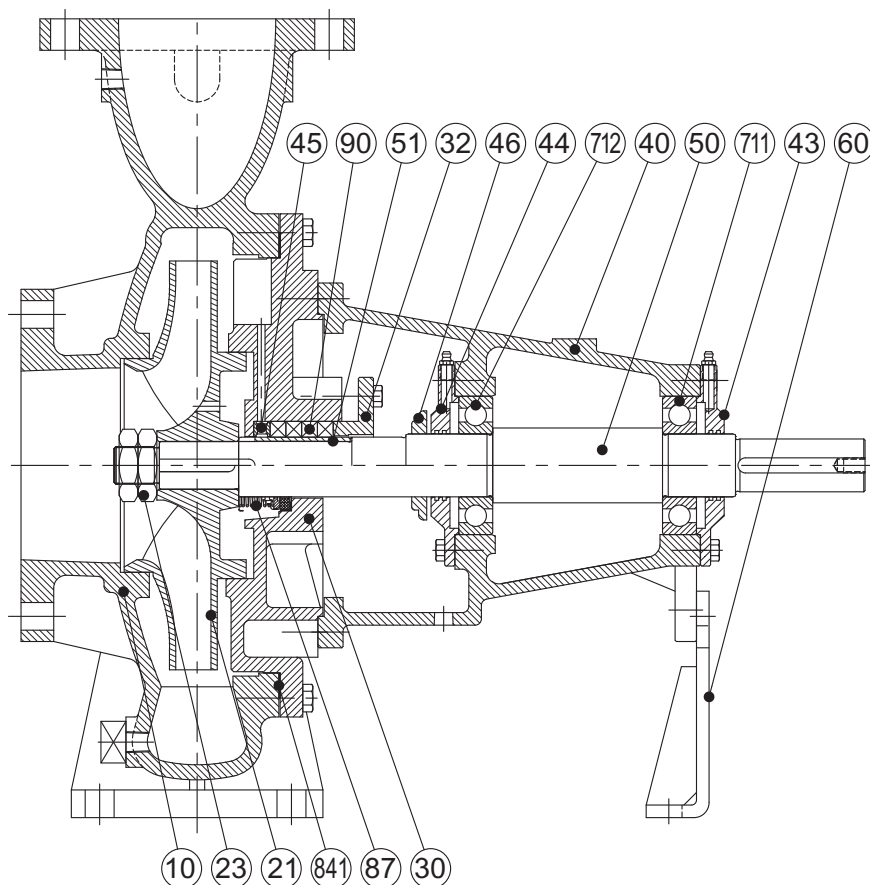

件號 PART NO	零件名稱	PART NAME
10	泵殼	Casing
21	葉輪	Impeller
23	葉輪螺帽	Imp cap screw
30	填料函	Stuffing box
32	填料蓋	Gland
40	軸承箱	Bearing frame
43	M側軸承蓋	Bearing cover
44	P側軸承蓋	Bearing cover
45	水封環	Lantern ring
46	擋水環	Water slinger
50	軸心	Pump shaft
51	軸套	Shaft sleeve
60	支腳	Foot
711	軸承	Radial bearing
712	軸承	Radial bearing
841	墊片	Gasket
87	機械軸封	Mechanical seal
90	填料	Gland packing

主要部分材質表		Material of main parts			
Part name		A	B	C	D
泵殼	Casing	FC250	SCS13	SCS14	
葉輪	Impeller	SCS13	SCS13	SCS14	
軸心	Pump Shaft	SUS410	SUS304	SUS316	
軸套	Shaft sleeve	SUS420J2	SUS304	SUS316	
填料函	Stuffing box	FC250	SCS13	SCS14	
軸承箱	Bearing frame	FC250			
填料	Gland packing	Gland packing			

※零件的互換性決定於軸與軸承系統，#S型，#M型，#L型，#XL型，#F160型等，這些軸與軸承系統都可以針對客戶需求作特殊設計，以滿足製程應用之需求。

Parts interchangeable based on shaft bearing system, #S type, #M type, #L type, #XL type, #F160 type, special designed to meet differential application is available




萬事興

ALL STAR PUMP

清水泵/白水泵 WXA

CLEAN WATER / WHITE WATER PUMPS

》尺寸表(Standard Dimensions)

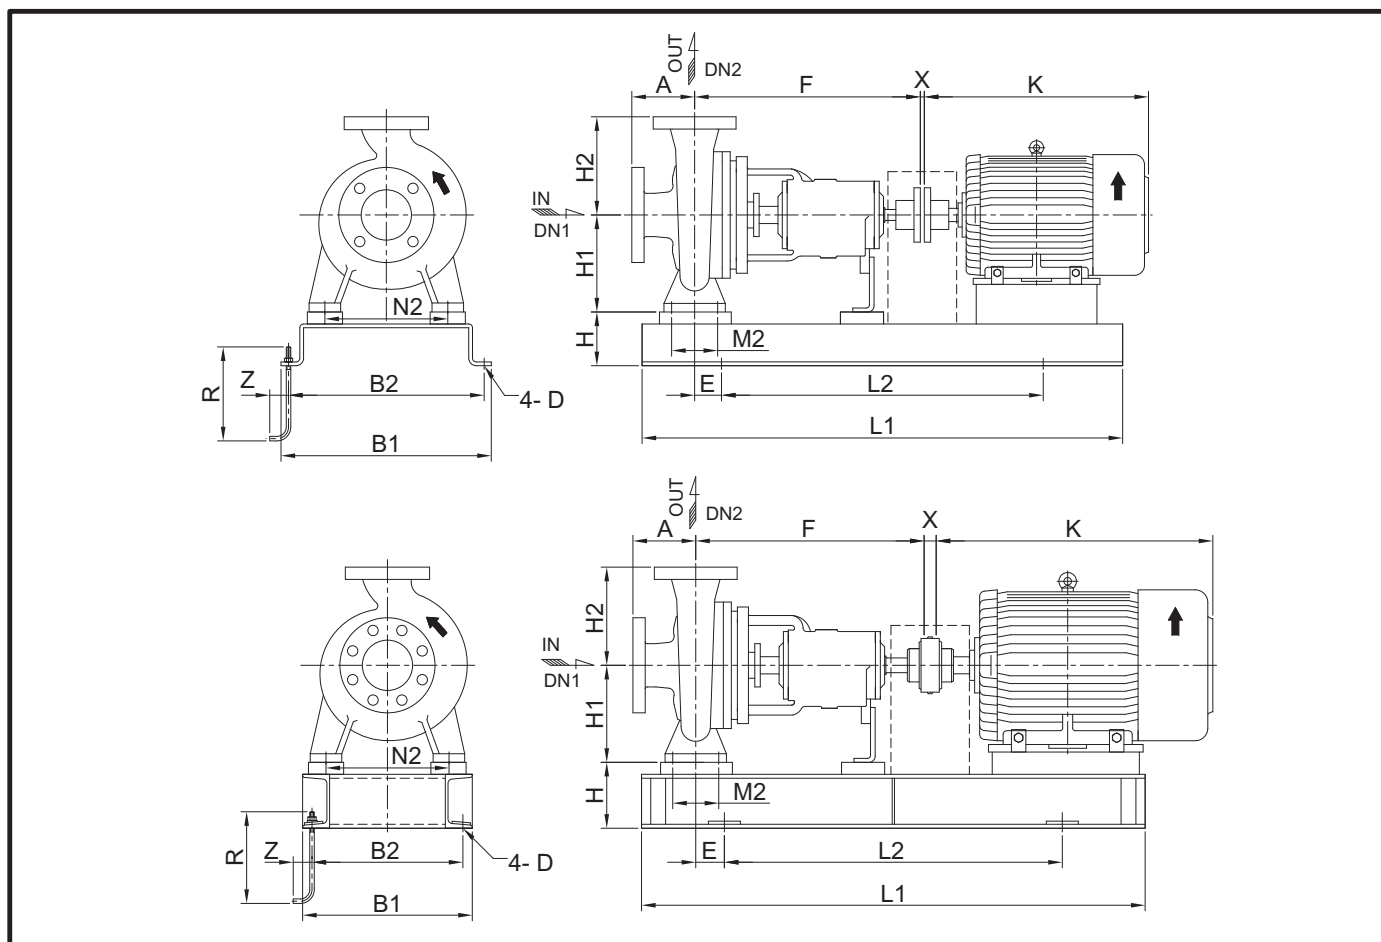

※以上尺寸僅供參考，正確尺寸依承認圖為基準。

單位(UNIT):mm

※ The above-mentioned size are only for reference, the correct size, in accordance with acknowledging pursuing as basis.

型號(Type)	軸型式 (Model)	DN1 (Inlet)	DN2 (Outlet)	A	F	H1	H2	泵重 (Weight)	馬達框號(參考) (FRAME)	M2	N2
50x25-160	S	50	25	80	385	132	160	37	71M~132M	70	190
40x25-200	S	40	25	110	360	160	189	47	80M~160L	50	189
50x32-130	S	50	40	80	360	112	140	36	63M~132S	70	140
50x32-160	S	50	40	80	360	132	160	42	71M~160M	70	190
50x32-200	S	50	40	80	360	160	180	52	80M~160L	70	190
50x32-260	S	50	40	100	360	180	225	61	100L~180L	95	250
65x40-130	S	65	40	80	360	112	140	46	71M~132M	70	160
65x40-160	S	65	40	80	360	132	160	48	71M~160M	70	190
65x40-200	S	65	40	100	360	160	180	50	80M~180M	70	212
65x40-260	S	65	40	100	360	180	225	63	100L~200L	95	250
65x50-130	S	65	50	100	360	132	160	41	80M~160L	70	190
65x50-160	S	65	50	100	360	160	180	55	80M~180M	70	212
65x50-200	S	65	50	100	360	160	200	55	90L~200L	70	212
65x50-260	S	65	50	100	360	180	225	65	100L~200L	95	250
80x65-130	S	80	65	100	360	160	180	50	80M~160L	95	212
80x65-160	S	80	65	100	360	160	200	58	90L~200L	95	212
80x65-200	S	80	65	100	360	180	225	61	100L~225S	95	250
100x80-160	S	100	80	125	370	180	225	58	90L~225S	95	250



萬事興

ALL STAR PUMP

清水泵/白水泵 WXA

CLEAN WATER / WHITE WATER PUMPS

型號(Type)	軸型式 (Model)	DN1 (Inlet)	DN2 (Outlet)	A	F	H1	H2	泵重 (Weight)	馬達框號(參考) (FRAME)	M2	N2
80x65-260	M	80	65	100	470	200	250	87	112M~280S	120	280
80x65-320	M	80	65	125	470	225	280	110	132S~180L	120	315
100x80-200	M	100	80	125	470	180	250	92	112M~250M	95	280
100x80-260	M	100	80	125	470	200	280	100	132S~250M	120	315
100x80-320	M	100	80	125	470	250	315	115	132S~200L	120	315
125x100-200	M	125	100	125	470	200	280	95	132S~180M	120	280
125x100-260	M	125	100	140	470	225	280	110	132M~180L	120	315
125x100-320	M	125	100	140	470	250	315	123	132S~200L	120	315
150x125-200	M	150	125	140	470	250	315	115	132S~200L	120	315
150x125-260	M	150	125	150	470	250	355	120	132S~200L	120	315
150x150-200	M	150	150	165	480	250	315	118	112M~200L	120	315
200x200-160	M	200	200	200	470	280	400	145	132S~180L	150	400
200x200-200	M	200	200	200	480	280	400	150	160L~250S	150	400
100x80-400	L	100	80	130	530	280	355	155	132M~250S	120	340
125x100-400	L	125	100	140	530	280	355	170	132M~200L	150	400
150x125-320	L	150	125	140	530	280	355	160	132M~250S	150	400
200x150-260	L	200	150	160	540	280	400	157	132M~250S	150	400
200x150-320	L	200	150	158	540	280	400	200	160M~225S	150	450
250x200-260	L	250	200	240	545	355	450	233	132S~250S	150	450
125x100-400	XL	125	100	140	530	280	355	175	225S~250M	150	400
150x125-400	XL	150	125	140	530	315	400	200	160L~280S	150	400
200x150-320	XL	200	150	158	540	280	400	200	250S~280S	150	450
200x150-400	XL	200	150	160	540	315	450	210	160L~315M	150	450
250x200-350	F160	250	200	230	680	355	450	315	180M~315S	150	430
250x200-400	F160	250	200	180	680	355	500	340	180M~315M	150	450
250x250-320	WBA#3	250	250	250	493	400	530	400	180M~315S	150	450
250x250-400	WAP#5	250	250	250	800	250	500	480	180L~NM315LL	430	640
300x300-400	WAP#5	300	300	270	792	400	625	615	200L~NM315XM	430	640
350x300-400	WAP#5	350	300	270	816	400	625	650	225S~NM355LS	430	640

單位(UNIT):mm

註: 底座的尺寸(B1,B2,D,H,E,L1,L2,X,K,Z,R)等是由馬達框號,聯軸器型號,與底座的製造方法等參數而決定,訂購前請與我們聯繫讓我們提供更詳細正確的資訊。

Base plate relative dimension (B1,B2,D,H,E,L1,L2,X,K,Z,R) depends on frame of motor, fabrication method and coupling type, please contact us to get more detail information before order.



萬事興

ALL STAR PUMP

清水泵/白水泵 WXA

CLEAN WATER / WHITE WATER PUMPS



ALL STAR PUMP


萬事興實業有限公司

PERFORMANCE RANGES

性能選擇表

MODEL: WXA

1760r.p.m (60HZ)

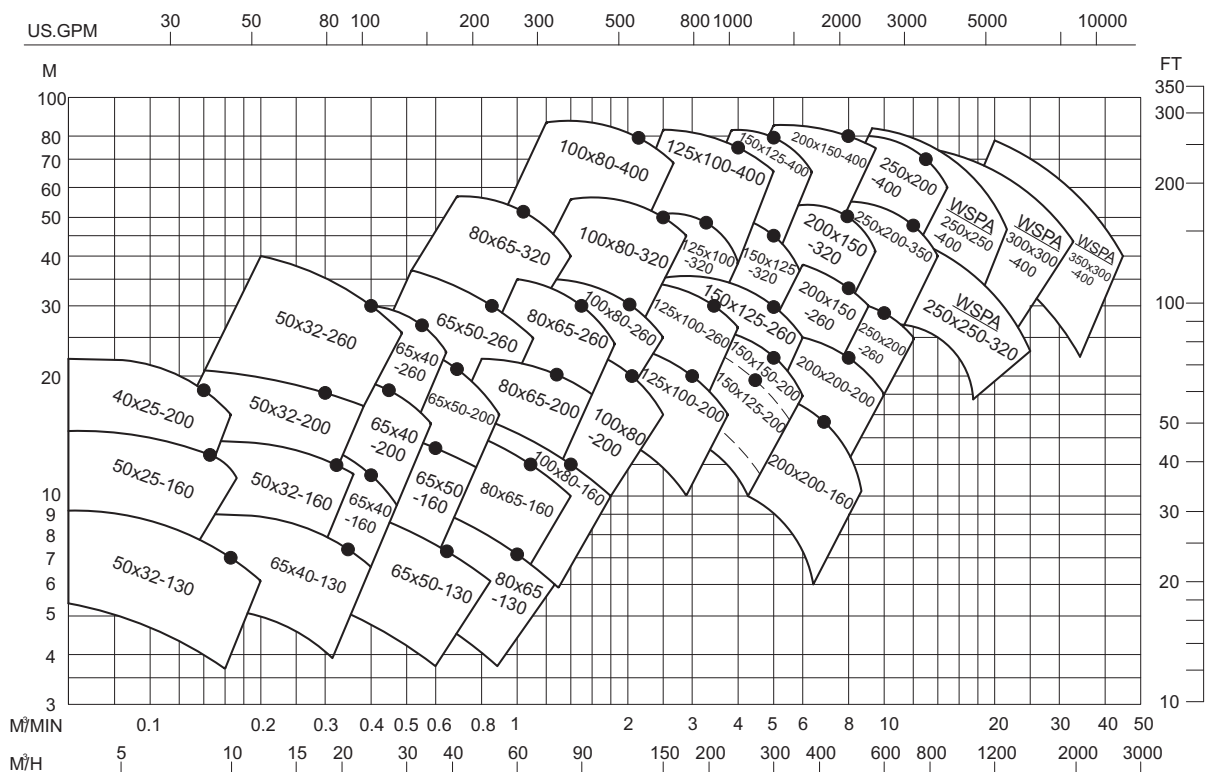



萬事興

ALL STAR PUMP

清水泵/白水泵 WXA

CLEAN WATER / WHITE WATER PUMPS



ALL STAR PUMP


萬事興實業有限公司

PERFORMANCE RANGES

性能選擇表

MODEL: WXA

1460r.p.m (50HZ)

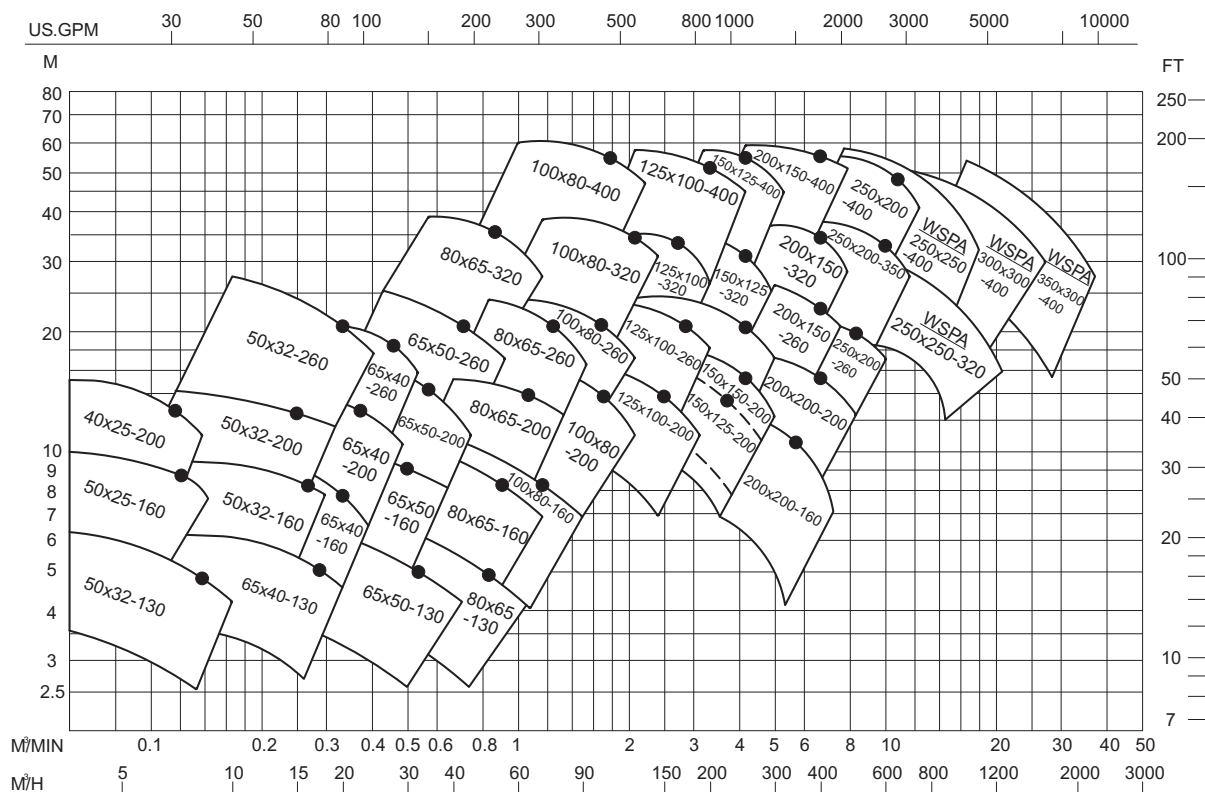



萬事興

ALL STAR PUMP

清水泵/白水泵 WXA

CLEAN WATER / WHITE WATER PUMPS

》如蒙洽詢請指示下列各項

In sending your enquiry or order, please inform us with the following Informations in details:

1. 出水量(Capacity): _____ m³/min, _____ US.GPM or _____ IMP. GPM .
2. 總揚程(Total head): _____ m or _____ feet
3. 液體(Liquid): _____
4. 液體溫度(Temperature of liquid): _____ °C or _____ °F
5. 紙漿濃度(Pulp consistency): _____ %
6. 比重(Specific gravity): _____
7. 酸鹼度(P.H.): _____
8. 運轉溫度下之蒸氣壓力(Vapor pressure at operating temperature):
_____ kg/cm², or _____ PSIA
9. 可用之淨有效吸入揚程(NPSH available): _____ m or _____ feet
10. 泵浦迴轉數(Pump speed): _____ rpm
11. 驅動馬達出力(Driven motor output): _____ KW or _____ HP
12. 電源特性(Electric characteristics):
_____ Phase _____ Cycle _____ Volts



萬事興實業有限公司

ALL STAR PUMP ENTERPRISE CO.,LTD.

嘉義市港坪里育人路165巷41弄14號 電話：05-2359597 傳真：05-2358969

No.14, Alley.41, Lane.165, Yuren Road, Gun-Pingli, Chiayi City, Taiwan, R.O.C.

TEL:886-5-2359597 FAX:886-5-2358969

<http://www.aspump.com.tw> E-mail:starpump@ms26.hinet.net